

Electrical (ballast)

- Standard 230V, 50/60Hz power supply (others available on request)
- Compact magnetic ballast supplied as standard (flicker-free electronic ballast available on request)
- Bipolar thermo-magnetic safety switch
- Capacitor for power factor correction
- Lamp-on and Power-on indicators
- 2m power supply cable (plug available on request)

Electrical (lantern)

- Lamp-holder type GY 22
- Silent fan
- Strain relief cable clamp entry into light housing
- 2.5 m lantern-to-ballast cable with lockable multi-pole connector

Optical

- 3 tempered lens condenser system: diameters 68, 90, 90mm
- Standard objective 23°, diameters 90mm
- Wide-beam objective 37°, diameters 90mm
- Long-throw objective 14°, diameters 110mm
- 4 removable shaping shutters mounted between plates specially treated with an anti-abrasive surface
- 18-leaf iris diaphragm with black-out
- Spherical reflector in 99.99% polished and treated aluminium

Safety


- Automatic power cut-out by bipolar microswitch on opening the lamp-tray
- Safety thermostat for power cut-out
- Filter-frame locking system
- Compliance to CE EN 60598-2-17 standards

Mechanical


- Die-cast extruded aluminium housing
- External black anti-scratch Epoxy Resin paint
- Black optical internal paint to give no light reflection and high-temperature resistance
- Labyrinth ventilation to avoid spill light

Operational

- M size gobo holder slots
- Lamp-tray hinged to the housing and completely removable for easy maintenance
- Yoke with 10mm diameter hole, reversible and sliding into extruded rails to allow installation, focusing and balancing of the accessories
- High insulated knobs and handles
- Optimum working distance 10 to 15m
- Manual dimmer (optional)
- DMX 512 controlled dimmer (optional)
- Rotating front head, removable and interchangeable with various focal-length optics

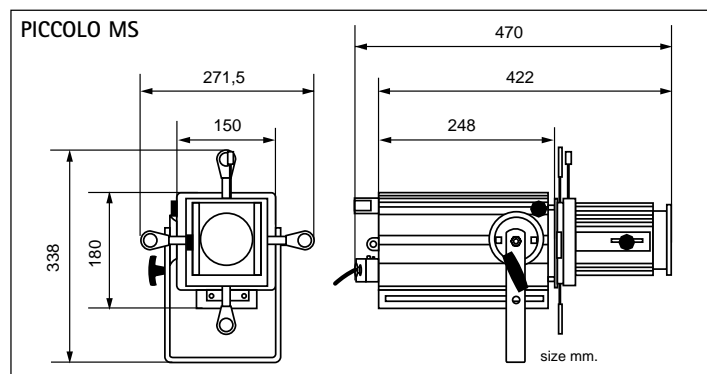

Net weight Kg 8.5 – Gross weight Kg 9.3 – Box volume m³ 0.032

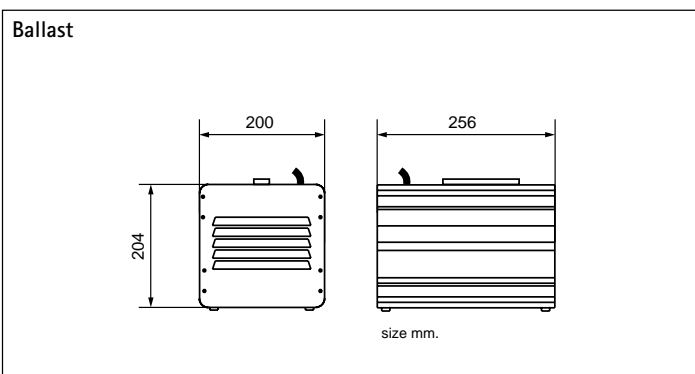

Net weigh Kg 14.8 – Gross weight Kg 15.3 – Box volume m³ 0.015

Information for ordering accessories and different versions

Code

- Piccolo MS with magnetic ballast, iris diaphragm with black-out and standard objective

PIC MS

Accessories

- Folding telescopic stand
- DIN / 10MA spigot adaptor
- Colour filter frame
- Manual colour changer (6 colours)
- Motorised colour wheel
- Gobo-holder for M size gobos
- DMX 512 or 0/10V controlled electro-mechanical dimmer
- Manual mechanical dimmer for standard and wide-beam objectives
- Manual mechanical dimmer for long-throw objectives
- Wide-beam objective 37°
- Long-throw objective 14°
- Special effects projection conversion kit (see single-effects technical data sheet)
- Set of wheels with brake for use with stand
- Ballast holder plate for use with stand

BS

DIN P 10

TC PIC

CMA PIC N

RM PIC

PGM 100

DIMPDMX

DIMPIMA/TC

DIMPIMA/OS

OLARPI

OSTRPI

TEPI

RF

SUP BA

Note: Some accessories may require special settings for mounting onto the long-throw objective (please specify before ordering).

Options

- 100-120V version
- Flicker-free electronic ballast

on request

on request

Lamp

Code

Type / Order code	SA 1200
Power (W)	1200
Lampholder	59
Light-centre/base distance (mm)	GY 22
Luminous flux (Lumen)	99000
Life time (hours)	500
Colour temperature (°K)	6500